

# Configure Qualtrics Survey to Require Touchstone Authentication

## Configure Qualtrics Survey to Require Touchstone Authentication

An MIT Qualtrics survey can be configured so that respondents must authenticate via Touchstone Single-Sign On (SSO) before accessing the survey. Additionally, the survey can be set to capture the respondent's email from the Touchstone login.

### Configure the Survey Flow to include an authenticator


To configure your MIT Qualtrics survey to require that respondents authenticate via Touchstone before accessing the survey:

- Select **Survey Flow**
- Select **Add a new element here**
- Select **Authenticator**
- Set authentication type to **SSO**
- Uncheck **Associate respondent with panel**
- Set SSO type to **Shibboleth**



### Move the authenticator block to the top of the survey

- Move the Authenticator to the beginning of your Survey Flow by clicking **Move** and dragging the authenticator to the top
- Move the survey questions inside the authenticator block by clicking **Move** and dragging the question block inside the authenticator block.

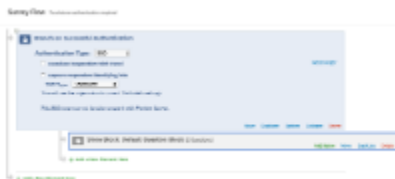

### Capture the respondent's email address

To capture the respondent's email address, based on their Touchstone authentication:

- Select **Capture respondent identifying info**
- Select **Add embedded data**
- Configure **email** attribute to be captured as **mail**. (**email = mail**)

